
ENTRANCE STATION

CIOT-L20M/L20M2

NEW

product design award 2016

reddot award 2017 winner

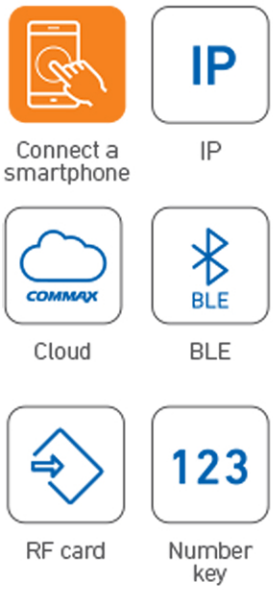



Rainshield(optiona)

- 7 inch LED Display • SIP-based VoIP system • 2MP camera
- BLE recognition • TCP/IP Communication • RFID card
- Motion Detection
- Used as a gate phone and lobby phone for parking blocker
- Elevator Call function (Connects to CCU-310EV) (CIOT-L20M2)

Power source	DC 14V, 1.8A
Mount type	Flush-mounted type
Operation temp.	-40°C~+50°C
Wiring ports	LAN(Cat.5e)
Storage	4GB eMMC FLASH
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)x216(H)
Fill up box size(mm)	220(W)×240(H)×81(D)