FLAP BARRIER



A Type



B Type




C Type



D Type

Specification:

1. Power supply: AC220±10V, 50Hz / AC110V ±10V, 60Hz
2. Temperature: -15 ~ 60℃
3. Humidity :< 95%, without concretion
4. Passage Width: 550~600mm
5. Passing Speed: 30 persons/Min (Normal open), 20 persons/Min (Normal close)
6. Arm Open/Close time: 1s
7. Power consumption: 100W/24V
8. Input Interface: +12V electrical signal or impulse signal with width more than 100mA
9. Material housing:-304 stainless steel; Arm-Plexiglass
10. Dimension: 1400mm x 300mm x 1000mm; Arm length: 260mm
11. Weight: 80Kgs
12. Arm Turning: Single direction or Bi-direction

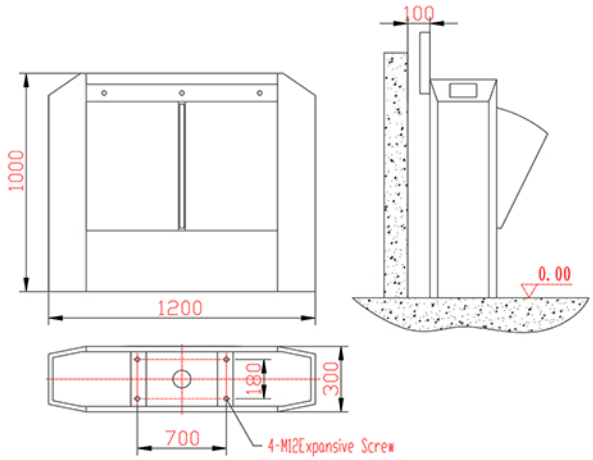

Functions and features:

1. When power off, arm open automatically and power on again, arm will be held automatically;
2. Anti-rush function: if there is no open signal, arm will be held tightly;
3. Double anti-clipping function: photocell anti-clipping and mechanical anti-clipping, protecting passengers.